


Description: Key push-button insert
(Blind push-button), 1-pole

Ref.-no.: 134.15

Key turn in right direction enables push-button control of a make- and break contact.

Without protection against dismounting.

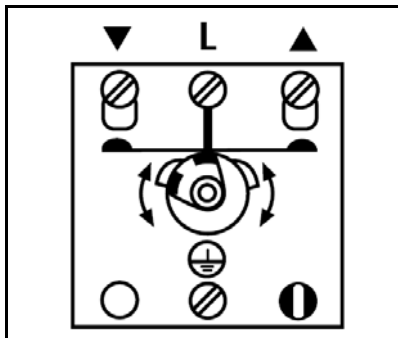

Contact assignments

Technical data

Switching voltage:	AC 250 V ~
Switching current:	10 AX
Connection:	screw terminals for wires up to 4 mm ²
Switch type:	Blind push-button, 1-pole (1 motor)

Accessories

Locking cylinder:	Ref.-no.: 28 (different locks)
	Ref.-no.: 28 G (equal locks)
Spare key:	Ref.-no.: 28 GSL (for locking cylinder 28 G)
